


**RONDE GELUIDSDEMPERS - SILENCIEUX RONDS**  
 met 100 mm isolatie en ingebouwde baffel - isolation 100 mm avec baffle

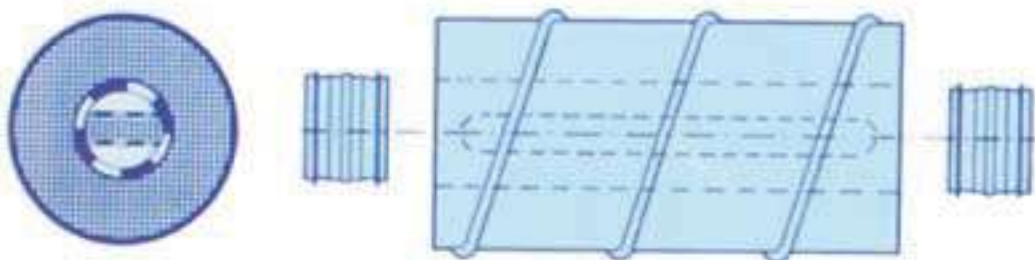

Ø d1	Ø d2	L	demping in dB per octaafband						
			insonorisation en dB par fréquence						
(mm)	(mm)	(mm)	125	250	500	1k	2k	4k	8k
315	500	900	7	17	29	38	46	34	23
315	500	1200	11	23	36	47	58	40	28
355	560	900	7	15	22	33	40	30	19
355	560	1200	10	21	32	45	52	36	24
400	600	900	6	15	19	28	37	23	18
400	600	1200	9	22	30	42	48	29	22
400	600	1500	12	26	34	46	51	32	23
450	650	900	6	12	18	26	28	19	14
450	650	1200	8	16	25	32	34	22	16
450	650	1500	9	19	29	35	37	25	19
500	710	900	6	13	19	27	30	20	15
500	710	1200	8	17	26	35	38	23	18
500	710	1500	10	20	30	38	40	25	20
560	750	900	7	9	18	25	22	18	13
560	750	1200	9	17	27	29	28	23	23
560	750	1500	11	21	31	36	34	26	24
630	850	900	9	15	24	31	28	18	14
630	850	1200	11	19	26	33	31	19	15
630	850	1500	12	21	28	34	32	24	19
710	900	900	7	13	20	26	24	16	12
710	900	1200	9	14	22	30	26	20	14
710	900	1500	9	17	28	29	30	26	20
800	1000	900	5	10	15	23	22	14	10
800	1000	1200	6	11	16	24	23	15	11
800	1000	1500	8	14	18	27	24	17	12
900	1120	900	6	11	21	23	22	17	13
900	1120	1200	7	13	24	26	24	18	14
900	1120	1500	11	18	29	30	26	19	16
1000	1250	900	5	9	13	21	17	13	9
1000	1250	1200	6	10	14	22	21	14	10
1000	1250	1500	7	13	16	25	23	16	11